WAAS	APP CRS	Rwy Idg	6500
CH 65704	016°	TDZE	679
W02A		Apt Elev	679

RNAV (GPS) RWY 2

CHICAGO/ LEWIS UNIVERSITY (LOT)

For inoperative MALSR, increase LNAV Cat. A and B visibility to 1 mile. VDP NA when using Joliet Rgnl altimeter setting. Baro-VNAV NA when using Joliet Rgnl altimeter setting. If local altimeter setting not received, use Joliet Rgnl altimeter setting and increase all DAs 29 feet and all MDAs 40 feet. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2500 direct ALASE and right turn via 116 track to BOJAK and hold.

AWOS-3	CHICAGO APP CON	UNICOM
118.525	119.35 388.0	122.8 (CTAF) L

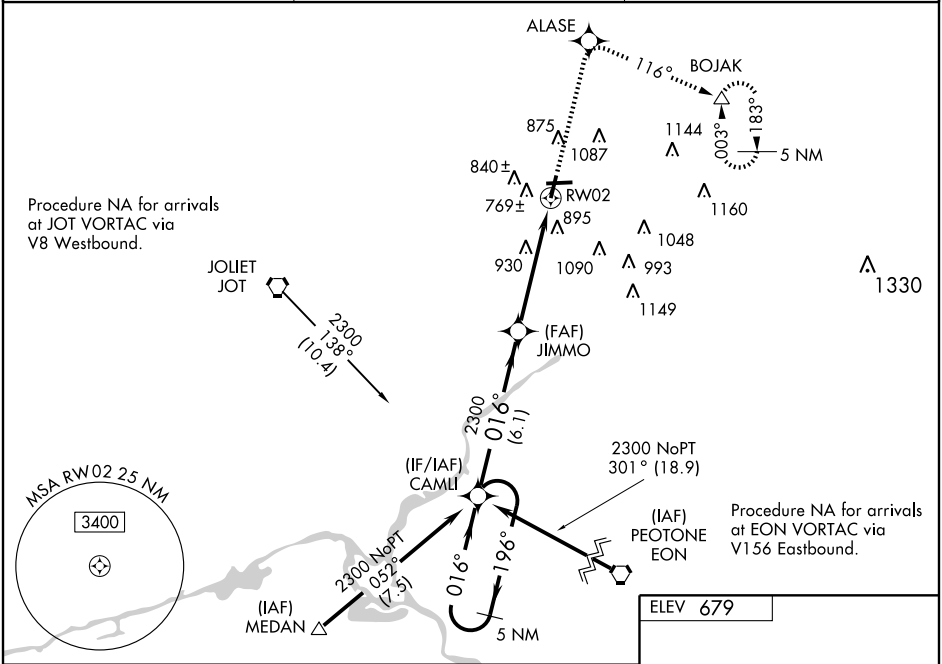

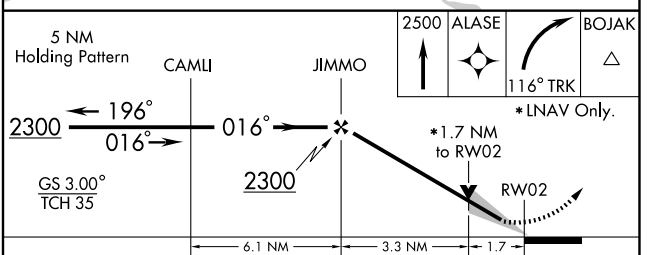

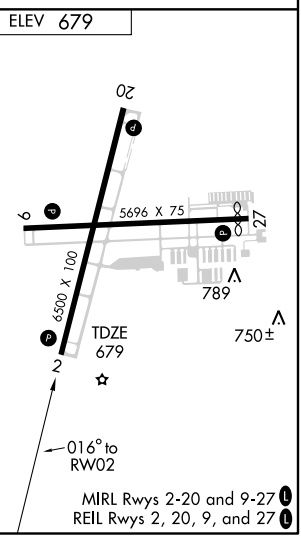

CATEGORY	A	B	C	D
LPV DA	929-¾ 250 (300-¾)			
LNAV/ VNAV DA	1256-1½ 577 (600-1½)			
LNAV MDA	1240-¾ 561 (600-¾)		1240-1 561 (600-1)	1240-1¼ 561 (600-1¼)
CIRCLING	1260-1 581 (600-1)		1260-1½ 581 (600-1½)	1440-2½ 761 (800-2½)

EC-3, 11 FEB 2010 to 11 MAR 2010
EC-3, 11 FEB 2010 to 11 MAR 2010